



Odo 3



Recessed mounted lamp with oriented light beam.

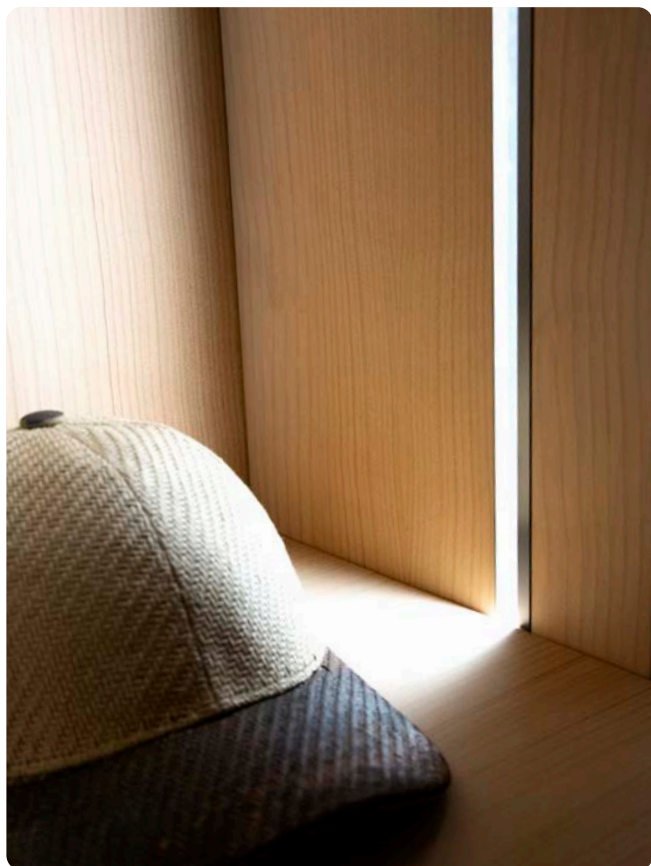

DESCRIPTION

Oxidized aluminum profile with opal polycarbonate diffuser and end caps; fixing clips included. Reflected light emission without visible LEDs, for anti-glare lighting effect.

Available in standard or custom length from 200mm to 3000mm (on request).

INTENDED USE

Ideal installed vertically in the side panels for lighting the interior of wardrobes, kitchen tall units and cabinets, as well as for lighting shelves

DIY VERSION


Odo 3 DIY

P.67

FINISHES

Available in aluminum or lead color finish. Other finishes upon request.

SECTION 1:1 (mm)




ALUMINIUM

12



LEAD COLOR

63



Odo 3

LED LIGHT SOURCE

P.406

Available in EDC (Dual Color)
or MONO (fixed color temperature)
versions

EDC

(24 V)

LED 10,8W/m | 1300lm/m | 120lm/W

CRI≥90

184x2 LEDs/m

DUAL COLOR: 3000K + 4000K



MONO (on request)

(24 V)

LED 7,6W/m | 1100lm/m | 145lm/W

CRI≥90

184 LEDs/m

2700K


3000K

4000K



ILLUMINANCE

Odo 3
1000 mm



SWITCHING AND CONTROL SYSTEMS

WITHOUT SWITCHING SYSTEM

P.408

On-Off control via switched outlet.
EDC jumper cable included, for color
temperature setting during installation.

Can be used with Smart Home control
solutions, transmitters or cabled switching
systems for On-Off, dimming and color
temperature adjustment.



POWER SUPPLY

MEC Lite

"Ready-to-light"
power supply system
with integrated distributor.

NOT INCLUDED

MEC LITE


P.364




FIXING

Recessed installation in through
milled groove.

Fixing clips included.







Odo 3

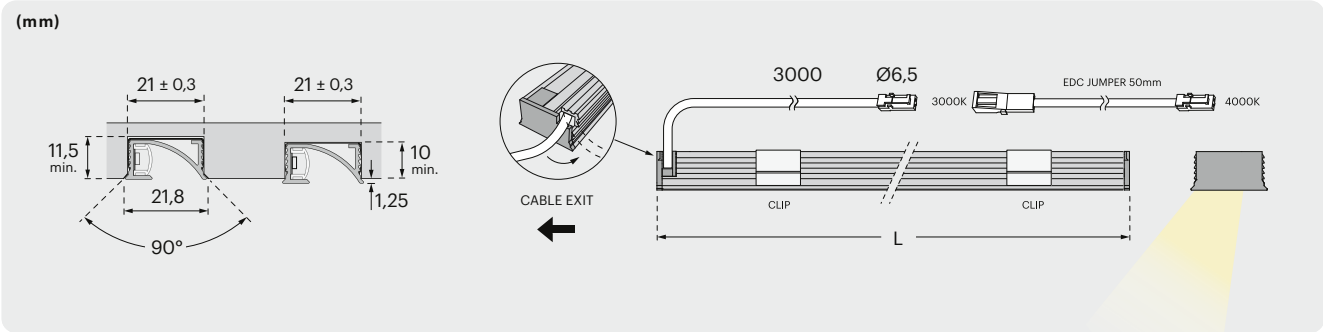

ODO 3	CCT	FINISH	L	W	CODE
Without switching system EDC jumper cable included, for color temperature setting during installation. Fixing clips included. Dimmable.	EDC 3000K+4000K	12 aluminium	413 mm	4,2W	553100046
			563 mm	5,9W	553100047
			863 mm	9,2W	553100048
			1163 mm	12,4W	553100049
		63 lead color	413 mm	4,2W	553100050
			563 mm	5,9W	553100051
			863 mm	9,2W	553100052
			1163 mm	12,4W	553100053

POWER CABLE OUTLET

When ordering, please consider the power cable outlet side in relation to the direction of the light beam: the standard configuration is with the cable outlet on the LEFT (←) referring to the lamp installed horizontally with the beam directed inward. On request, it is possible to configure the cable outlet on the RIGHT (→) to optimize the cable outlet on the same side with a pair of lamps installed vertically on the sides of the cabinet.

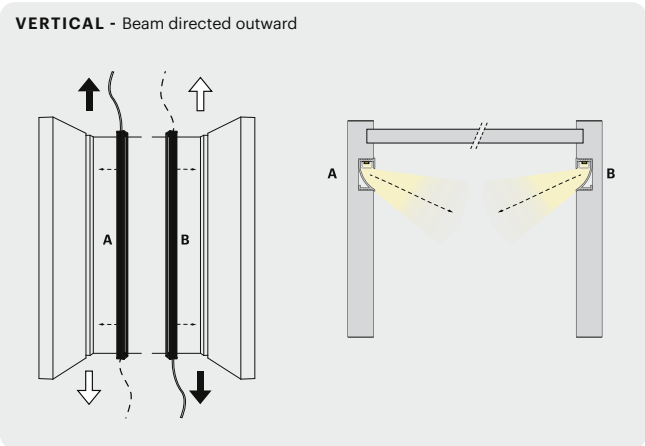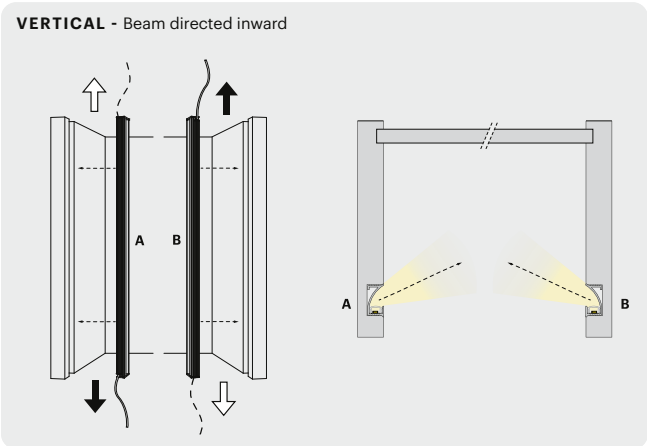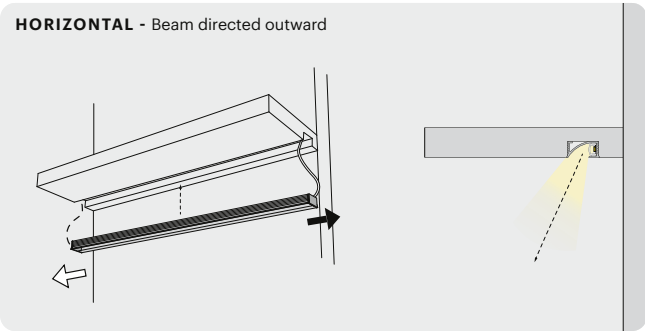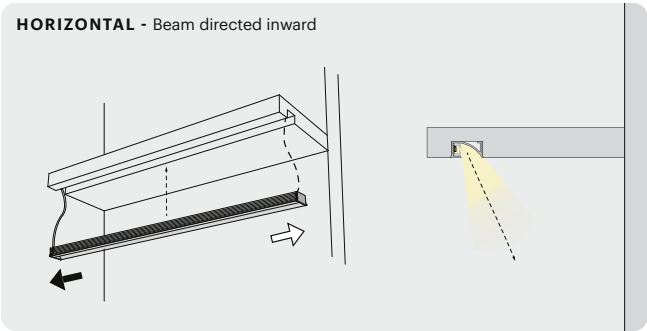

Odo 3 DIY


DESCRIPTION

Cuttable to size oxidized aluminium profile for recessed mounting available in aluminium or lead color finish.

It combines with a cuttable to size opal polycarbonate diffuser and polycarbonate end caps (optional).

Installation by means of fixing clips.

SECTION 1:1 (mm)



ALUMINIUM PROFILE

3000 mm

12 Aluminium	942800058
63 Lead Color	942800059

POLYCARBONATE DIFFUSER

3000 mm

Opal	944000048
------	-----------

END CAPS






2x

12 Aluminium	600900048
63 Lead color	600900049

FIXING CLIPS

1x

Metal	755300022
-------	-----------



ELECTRIFICATION

LED	4mm pre-cut cabled strip ON REQUEST
-----	--

DRIVER	MEC Lite
--------	----------

P.364